

SCOTT Scale 930




Frame	Scale 3 Carbon / IMP technology / HMF BB92 / SW DM dropouts for Boost 12x148mm SDS2 advanced Shock & Standing Damping System / ICCR Cable routing
Fork	Fox 32 Float Rhythm Grip 3 / 3-Modes / 15x110mm QR axle / tapered steerer Reb. Adj. / Lockout / 100mm travel
Remote System	SCOTT Rideloc Technology / below bar remote 3 modes / integ. Grip clamp
Headset	Syncros Pro Drop in / Tapered 1.5"-1 1/8" Bearing diameter size 42mm and 52mm
Rear Derailleur	Sram SX / Eagle 12 Speed
Shifter	Sram SX Eagle Trigger
Brakes	Shimano MT401 Disc SM-RT10 CL rotor / 180F / 160R
Crankset	SRAM SX Eagle DUB Boost 32T
BB-Set	SRAM DUB PF integrated / shell 41x92mm
Handlebar	Syncros Fraser 2.0 / Alloy 6061 T shape Flat / 9° / 740mm Syncros Pro lock-on grips
H'stem	Syncros FL 2.0 / 6° Integrated Spacer & Top Cap 6061 Alloy / 31.8mm / 1 1/8"
Seatpost	Syncros Duncan 2.0 / 10mm offset 31.6mm x 400mm
Seat	Syncros Belcarra Regular 2.5
Hub (Front)	Shimano HB-MT400-B CL / 15x110mm
Hub (Rear)	Shimano FH-MT400-B CL Boost 12x148mm

Chain	SRAM CN NX Eagle
Cassette	SRAM SX-PG1210 / 11-50 T
Spokes	Stainless Black 15G / 1.8mm
Rims	Syncros X-25 Disc / 32H / 25mm Tubeless Ready
Tires	WTB Ranger / 2.25" / 60TPI / Aramid Bead TCS Light / Fast Rolling / Tubeless Ready
Aprox weights in KG	11.50
System Weight	128 kg Le poids total inclus le vélo, le poids du cycliste, son équipement et des éventuels accessoires.



Les modèles de la série SCOTT Scale 930 sont dotés d'un cadre en fibre de carbone ultraléger. Une suspension Fox, une transmission SRAM Eagle et des composants Syncros combinés pour offrir un vélo prêt pour la compétition léger et efficace.

SCOTT Scale 930

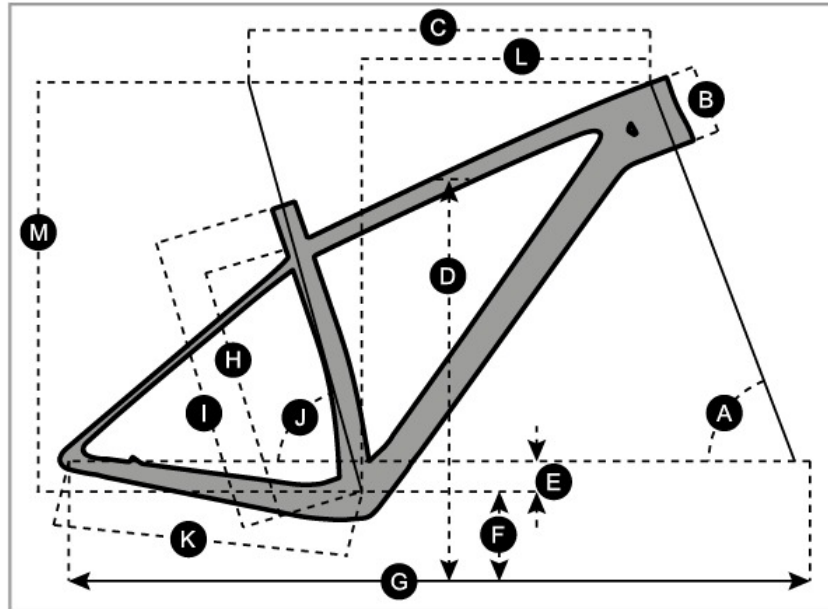

SCALE 900 RC SERIES &
SCALE: 910, 920, 925, 930, 940

		S	M	L	XL
A	head tube angle	69.5 °	69.5 °	69.5 °	69.5 °
B	head tube length	95.0 mm	100.0 mm	115.0 mm	125.0 mm
C	top tube horizontal	575.0 mm	600.0 mm	625.0 mm	650.0 mm
D	standover height	743.0 mm	774.0 mm	800.0 mm	835.1 mm
E	BB offset	-58.0 mm	-58.0 mm	-58.0 mm	-58.0 mm
F	BB height	312.0 mm	312.0 mm	312.0 mm	312.0 mm
G	wheel base	1076.4 mm	1101.8 mm	1127.9 mm	1153.7 mm
H	BB center to toptube center	325.0 mm	375.0 mm	415.0 mm	465.0 mm
I	BB center to top of seattube	390.0 mm	440.0 mm	480.0 mm	530.0 mm
J	seat angle	73.6 °	73.6 °	73.6 °	73.6 °
K	chainstay	425.0 mm	425.0 mm	425.0 mm	425.0 mm
L	reach	398.7 mm	422.3 mm	443.2 mm	465.5 mm
M	stack	599.0 mm	603.6 mm	617.7 mm	627.1 mm
N	stem length	60.0 mm	70.0 mm	80.0 mm	90.0 mm

SIZE CHARTS

Body Height	< 165 cm	165 - 175 cm	175 - 185 cm	185 - 195 cm	> 195 cm
SPARK SPARK eRIDE CONTESSA SPARK CONTESSA SPARK eRIDE AXIS EVO eRIDE		S	M	L	XL
GENIUS CONTESSA GENIUS GENIUS eRIDE CONTESSA GENIUS eRIDE RANSOM STRIKE eRIDE CONTESSA STRIKE eRIDE		S	M	L	XL
GAMBLER		S	M	L	
SCALE CONTESSA SCALE BIG JON	XS	S	M	L	XL
ASPECT ASPECT eRIDE CONTESSA ASPECT eRIDE AXIS eRIDE	XS	S	M	L	XL
FOIL ADDICT CONTESSA ADDICT ADDICT CX METRIX SPEEDSTER CONTESSA SPEEDSTER ADDICT GRAVEL SPEEDSTER GRAVEL CONTESSA SPEEDSTER GRAVEL	XXS	XS	S	M	L
SILENCE eRIDE SUB SUB eRIDE		S	M	L	XL
PLASMA		S	M	L	XL
CONTESSA ACTIVE CONTESSA SCALE ALLOY	XS	S	M	L	
FUTUREPRO					
Body Height	140-150 cm	150-160 cm	160-170 cm		
SCALE 700		XS	S	M	
SPARK 700		XS	S		
SPARK 600	XS				
ROXTER 600 CONTESSA 600 ROXTER eRIDE 26	XS	S	M		
JUNIOR					
Body Height	85-100 cm	90-110 cm	95-125 cm	120-135 cm	130-145 cm
Approximate Age	2-4	3-5	4-6	6-9	9-11
SCALE			Wheel 16"	Wheel 20"	Wheel 24"
ROXTER	Wheel 12"	Wheel 14"	Wheel 16"	Wheel 20"	Wheel 24"
CONTESSA	Wheel 12"	Wheel 14"	Wheel 16"	Wheel 20"	Wheel 24"
GRAVEL					Wheel 24"
ROXTER eRIDE 24					Wheel 24"